



GENERAL

Dimension(L*W*H)	10180×2550×3940 mm
Total Weight	31000 kg
Curb Weight	20055 kg
Max Vertical Reach	24 m
Max Horizontal Reach	20 m
Outrigger Span: Front/Rear/Front-Rear	3860×2200×6020 mm
Chassis Brand	HOWO(Sinotruck)
Driving Form	8x4
Remote Control	OHM
Hydraulic Oil Tank Capacity	300 L
Water Tank Capacity	800 L
Hopper Volume	0.5 m³

BOOM

Number of Booms	3 Sections
Folding Type	Z Fold
Outrigger	H Style
1st Length/ Rotation Angle	7000/90°
2nd Length/ Rotation Angle	6400/180°
3rd Length/ Rotation Angle	6500/260°
Turret Rotation Angle	± 360°
Rotation Tower	Hydraulic motor + reducer
Boom Multi-way Valve	Radk-Tech

PUMPING & MIXING


Theoretical Output	58 m³/h
Theoretical Pumping Pressure	7.2 MPa
Theoretical Pumping Times	31 times/min
Main Hydraulic Oil Pump Brand	Rexroth
Concrete Pipe Diameter	100 mm
Delivery Pumping Cylinder External Diameter	200 mm
Delivery Cylinder Stroke Length	1000 mm
Mixer Capacity	7.3 cubic
Mixer Drum Pump/Engine Brand	Danfoss
Mixing Drum Pump Theor Output	100 mL/r
Mixing Drum Engine Theor Output	75 mL/r

DIMENSIONS




DIAGRAMS

OUTRIGGER EXTENSION

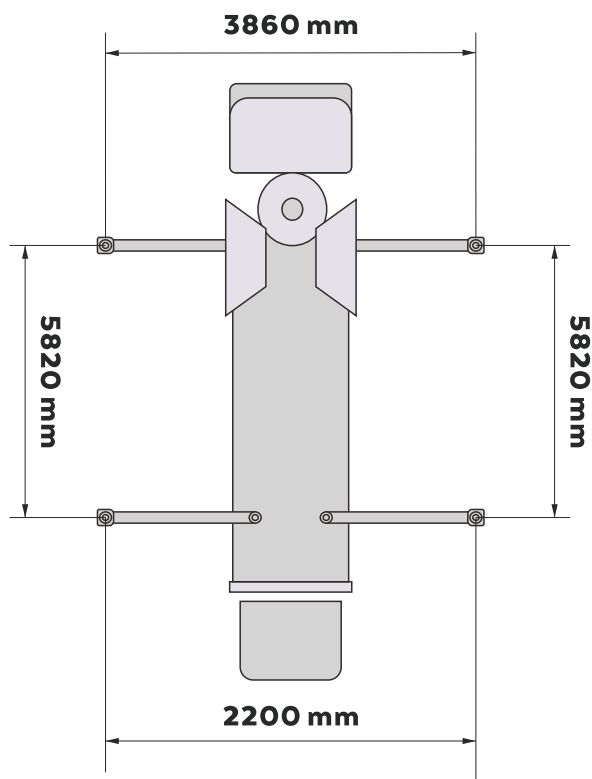

BOOM PUMP REACH

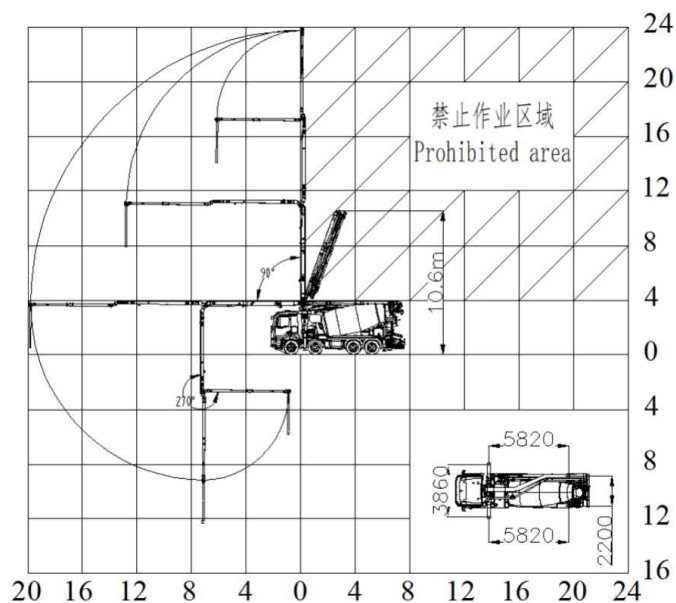

WWW.XANJER.COM

High-Tech Industrial Zone, Guanxi Town,
Changde, Hunan, China 415106
Service Hotline
Tel:0086-4006969099
Mail:info@xanjer.com

The product configuration (including technical parameters) is subject to change and the delivered actual machine without notice.